


Historically,  
industrial laundries  
are labor-intensive,  
high-stress operations.

**Custom Control  
Systems**

has changed that.

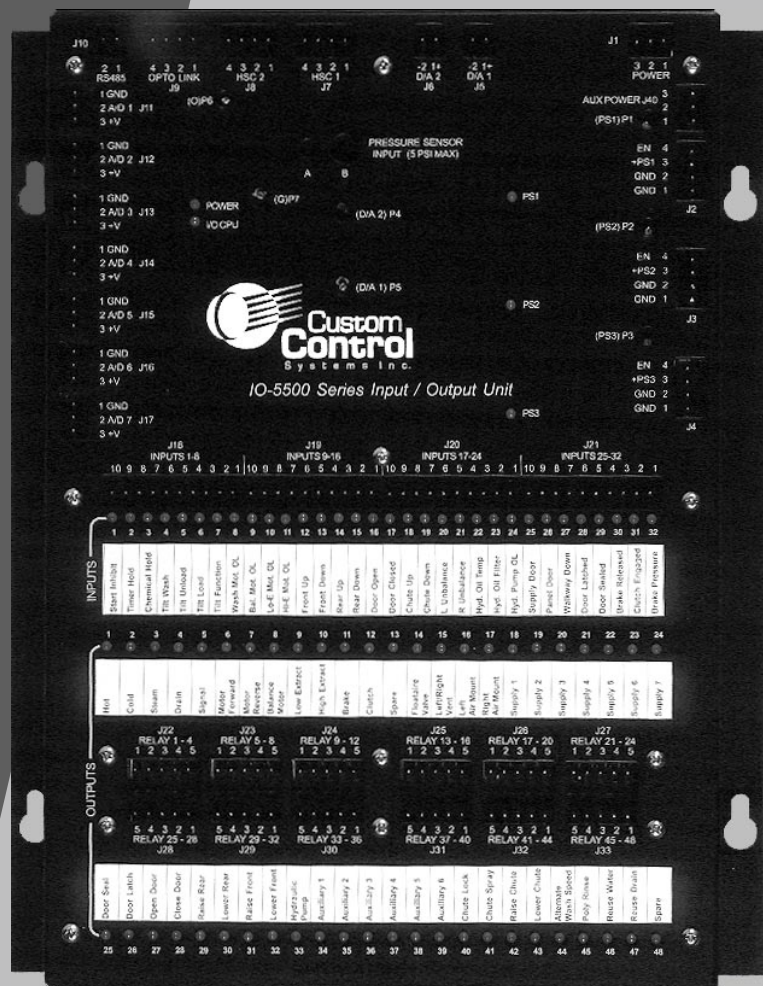

## 10 - 5 5 0 0 F E A T U R E S

**Relay Outputs** Up to forty-eight relay outputs; normally open relay contacts rated 5A @ 250VAC

**Inputs** Up to thirty-two contact closure inputs; may be configured to sink or source current

**Analog Inputs** As many as seven analog input channels; two are configured for use with two- or three-wire RTD temperature sensors; channels may be configured for 0-2.55V, 0-5V, or 0-10V inputs; 10-bit A/D converter

**High-speed Counters** Two high-speed counter channels available; 1.3 MHz maximum pulse rate on channel one; 5.1KHz maximum pulse rate on channel two

**Analog Outputs** Two 12-bit analog output channels available; may be configured for 0-2.55V, 0-5V, 0-10V, or 4-20mA outputs

**Auxiliary Power Supplies** Up to four on-board auxiliary power supplies for photoeyes, proximity switches, etc.; 5-24VDC output

**Power Source** 12 - 24 Volts AC, 50 - 60 Hz.

For more information:

Custom Control Systems Inc.

2007 Beech Grove Place

Utica, New York 13501

315.732.1990

Fax 315.732.1666

[www.customcontrolsystems.com](http://www.customcontrolsystems.com)